



# Symmetric Cryptography (Through the 1980s or so...)

CSE 548 Spring 2024  
jedimaestro@asu.edu

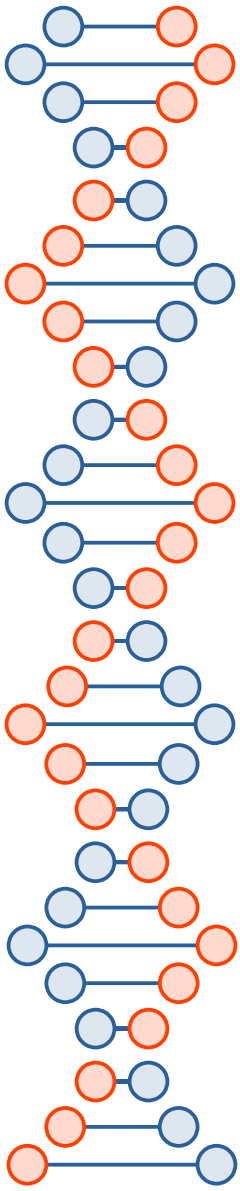

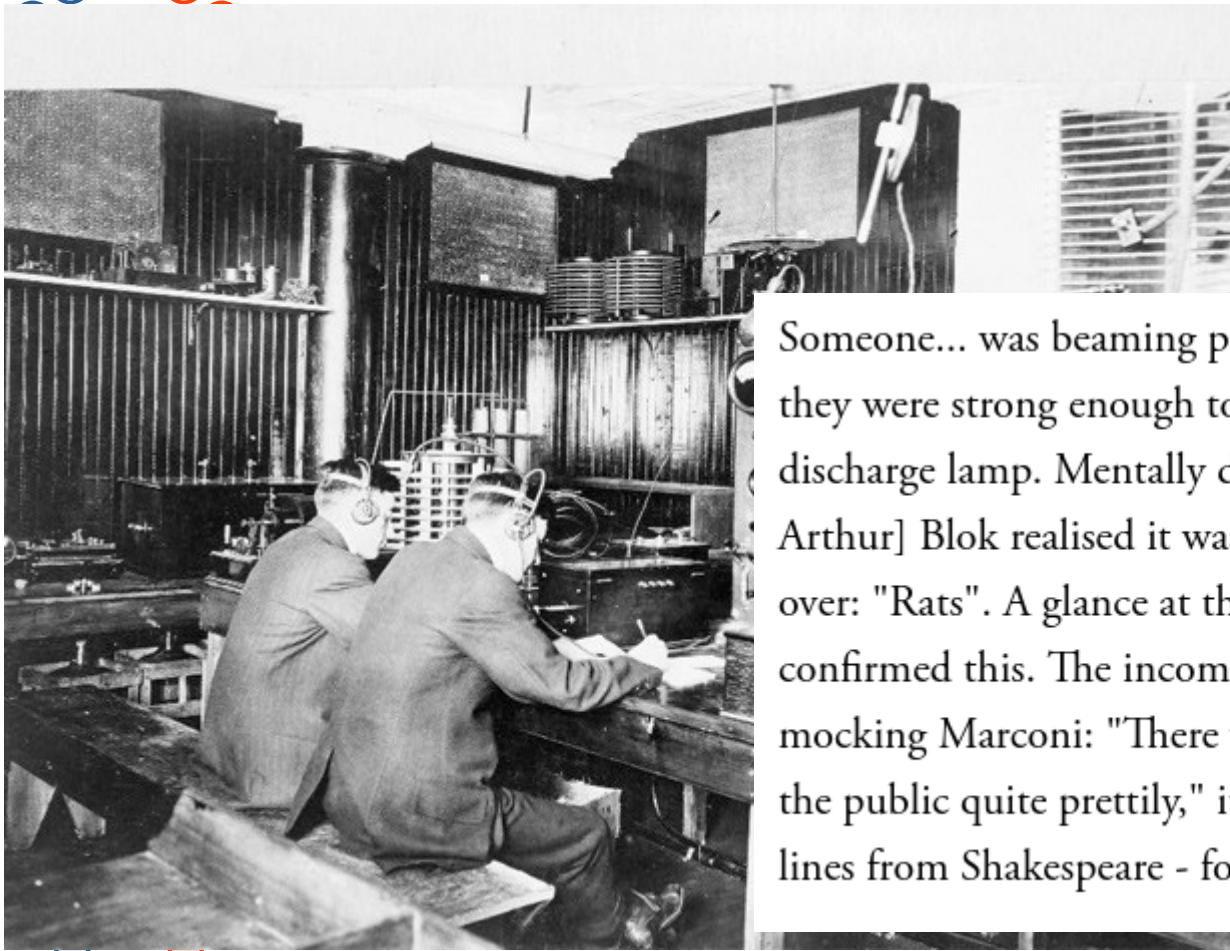


Someone... was beaming powerful wireless pulses into the theatre and they were strong enough to interfere with the projector's electric arc discharge lamp. Mentally decoding the missive, [Fleming's assistant Arthur] Blok realised it was spelling one facetious word, over and over: "Rats". A glance at the output of the nearby Morse printer confirmed this. The incoming Morse then got more personal, mocking Marconi: "There was a young fellow of Italy, who diddled the public quite prettily," it trilled. Further rude epithets - apposite lines from Shakespeare - followed.

<https://www.theatlantic.com/technology/archive/2011/12/the-great-wireless-hack-of-1903/250665/>



2.450.000.000

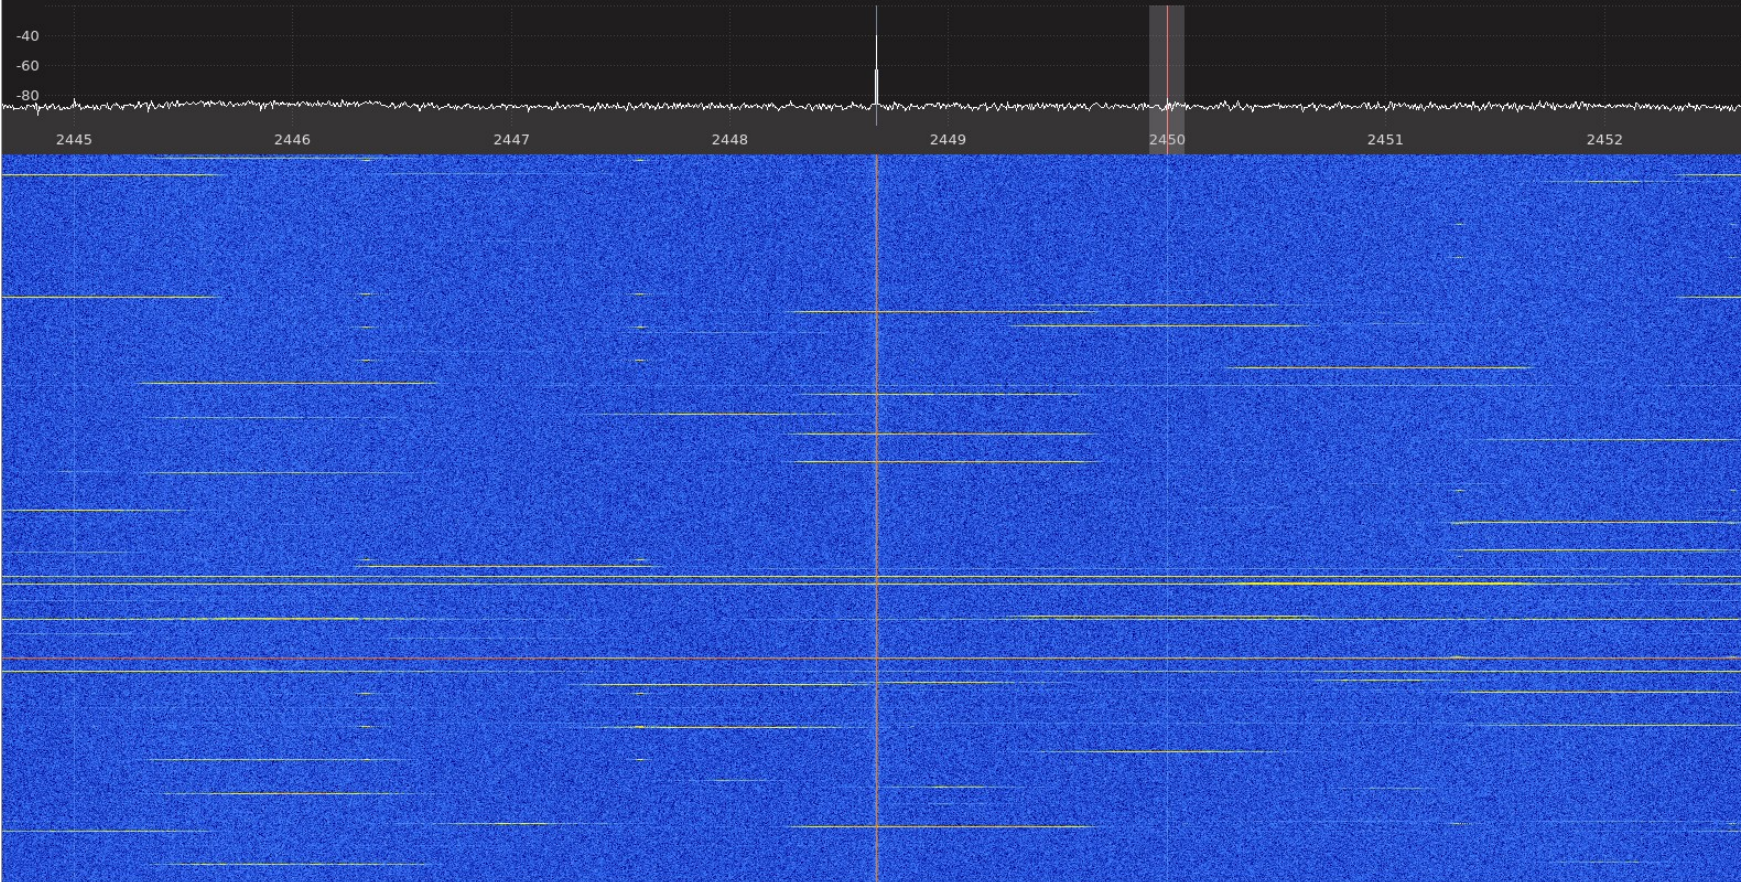


FFT Settings

FFT size: 8192 RBW: 976.6 Hz  
Rate: 60 fps Overlap: 0%  
Time span: Auto Res: 0.02 s  
Window: Hann  
Averaging: [Slider]  
Panadapter: [Slider] Waterfall  
Peak: Detect Hold  
Pand. dB: [Slider] Lock  
Wf. dB: [Slider]  
Freq zoom: [Slider] 1x  
Reset Center Demod  
Color: White Fill  
Colormap: Gqrx  
 Enable Band Plan

Input cont... Receiver Opti... FFT Setti...

Audio



Gain: [Slider] -7.2 dB


Mute UDP Rec Play ...

DSP





# Basics of crypto...

- Symmetric encryption
  - Assumes two parties wishing to communicate already have a shared secret
- Asymmetric encryption
  - Makes different assumptions (e.g., that everybody knows the public key or that the eavesdropper is passive)
  - Quantum computers break current algorithms that are used in practice
- Secure hash functions and message authentication

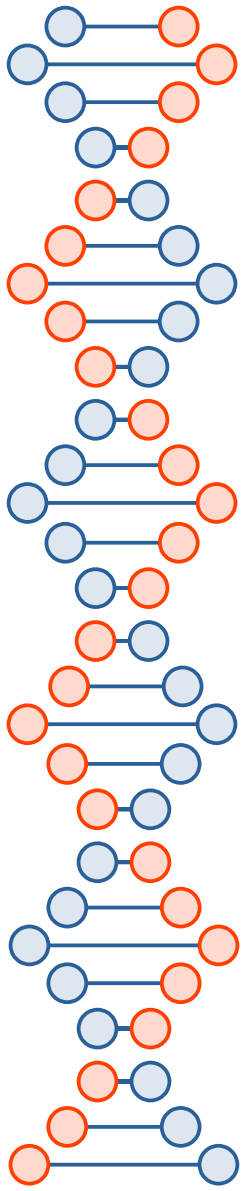

# Symmetric Crypto


- Confidentiality
- Integrity
- ~~Availability~~
- Authentication
- ~~Non-repudiation~~
- ~~A way to distribute the shared secret keys~~

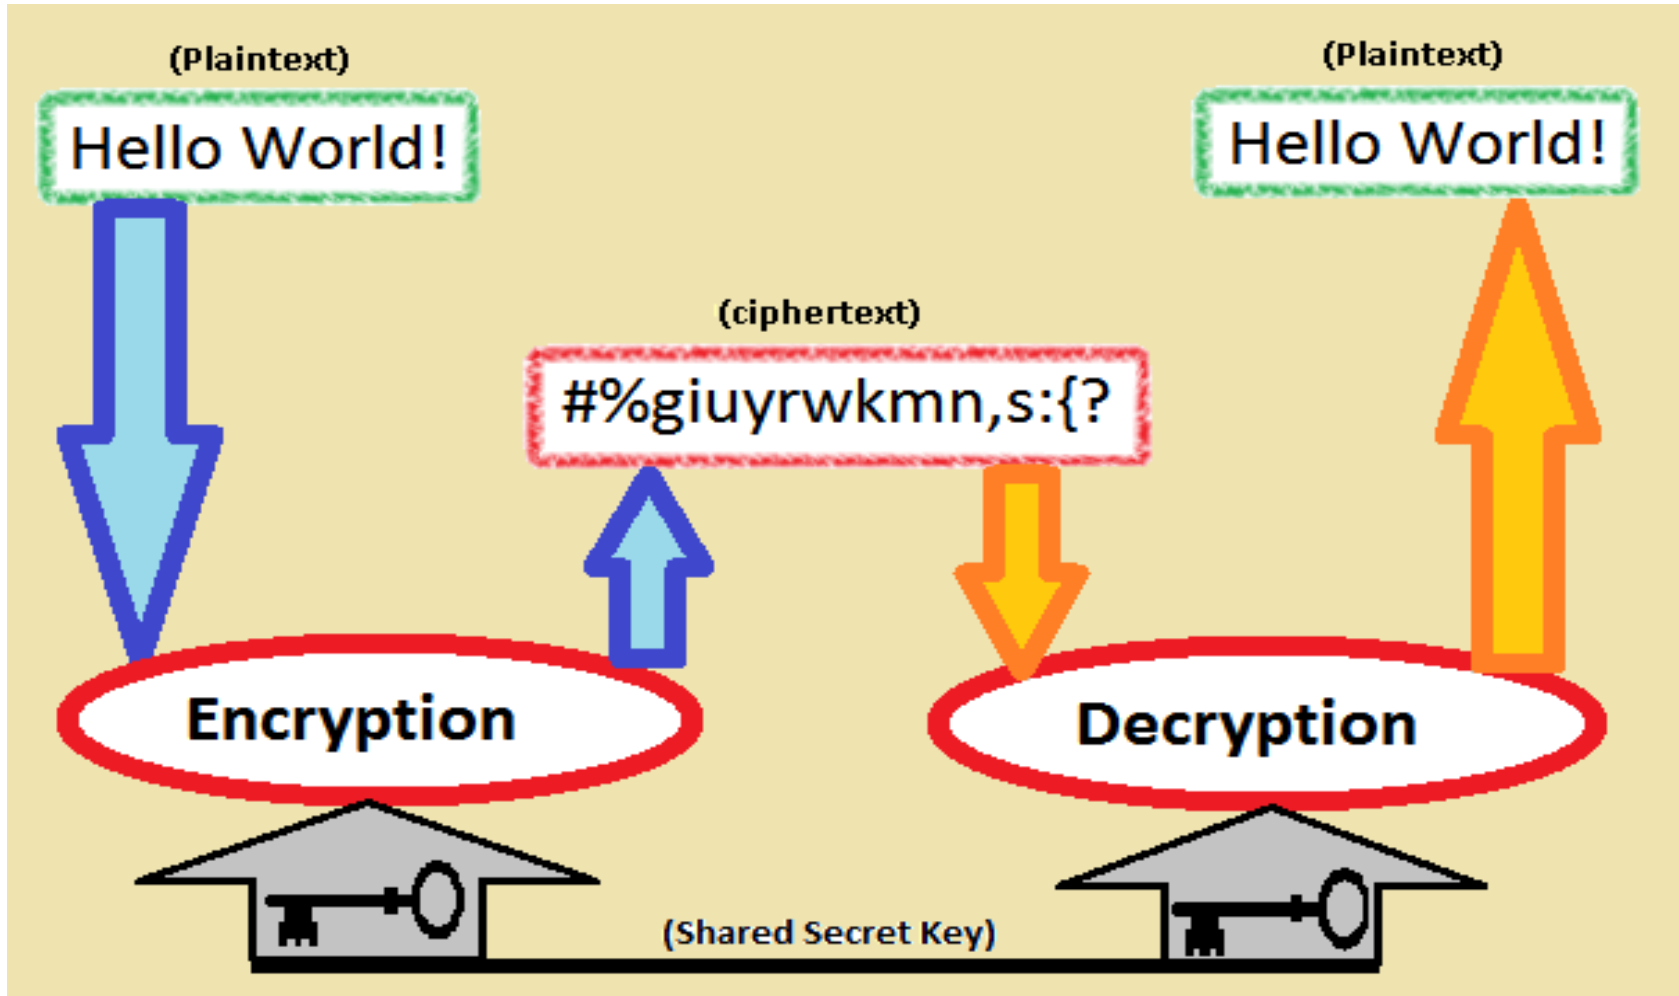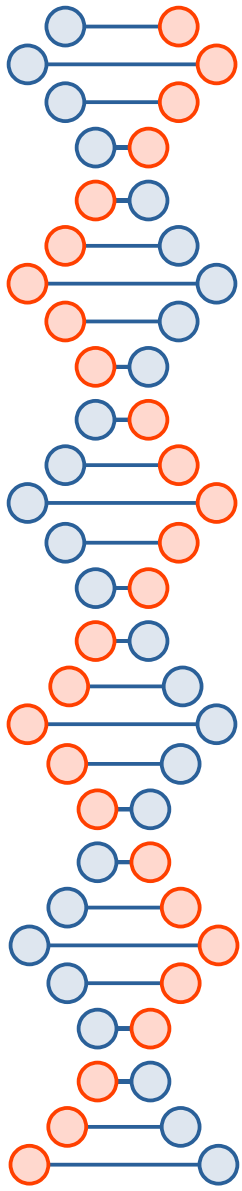

Source: Wikipedia


# Terminology

- Plaintext – before encryption, easy to read
- Ciphertext – after encryption, hopefully indecipherable without the key
- Key – the shared secret, typically just bits that were generated with a high entropy process

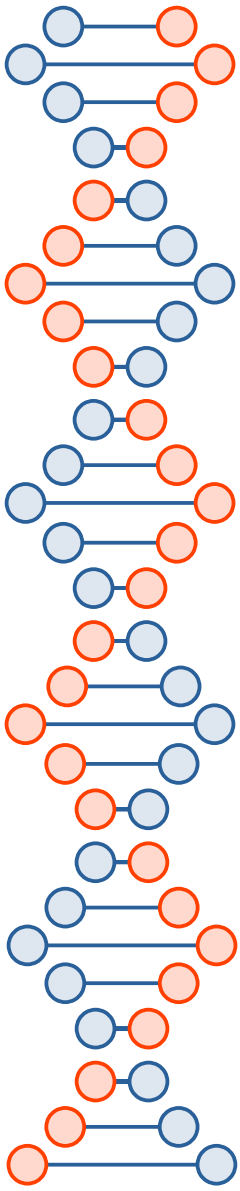

# Review on your own...


- Caesar Cipher
- Vigenere Cipher and related attacks

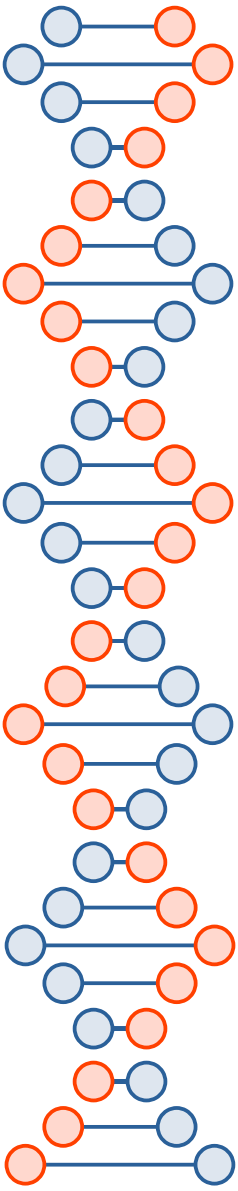



# Modern symmetric crypto

- Mostly:
  - Substitution
  - Permutation
  - XOR

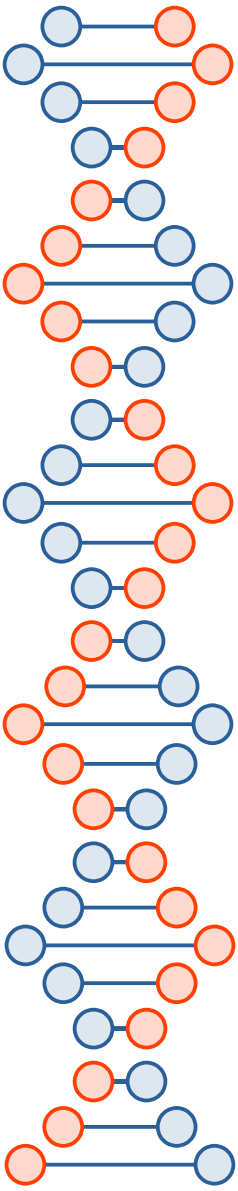




## Substitution


HELLO WORLD

TNWWX DXPWE

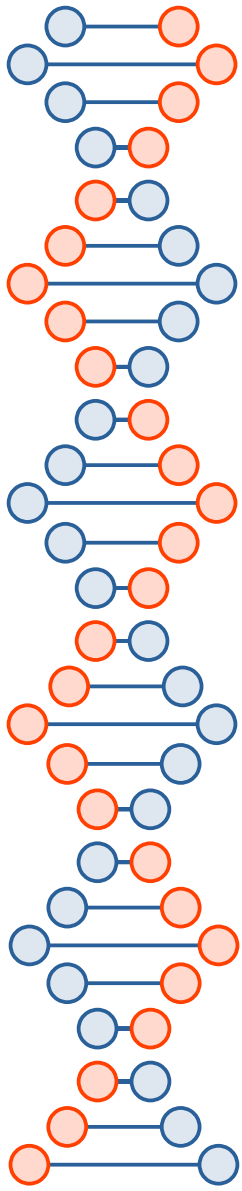


# Permutation

ABCD	ABDC	ACBD	ACDB	ADBC	ADCB
BACD	BADC	BCAD	BCDA	BDAC	BDCA
CABD	CADB	CBAD	CBDA	CDAB	CDBA
DABC	DACB	DBAC	DBCA	DCAB	DCBA

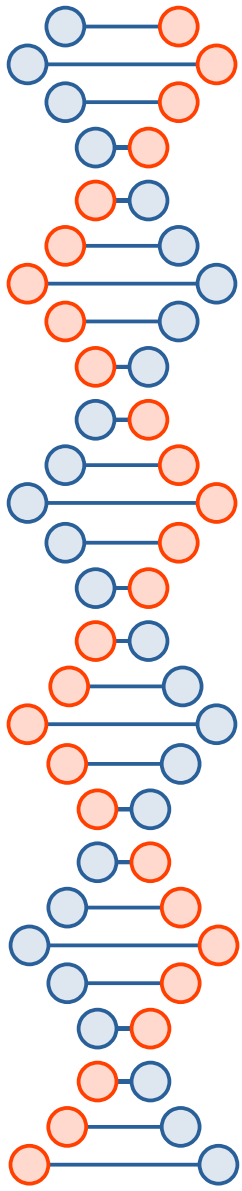


## Bitwise XOR

$$\begin{aligned} & 00101010_b \\ \oplus & 10000110_b \\ = & 10101100_b \end{aligned}$$

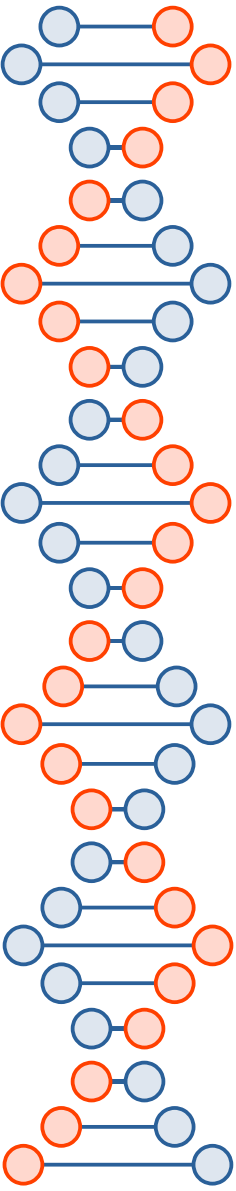


2000+ years of history...

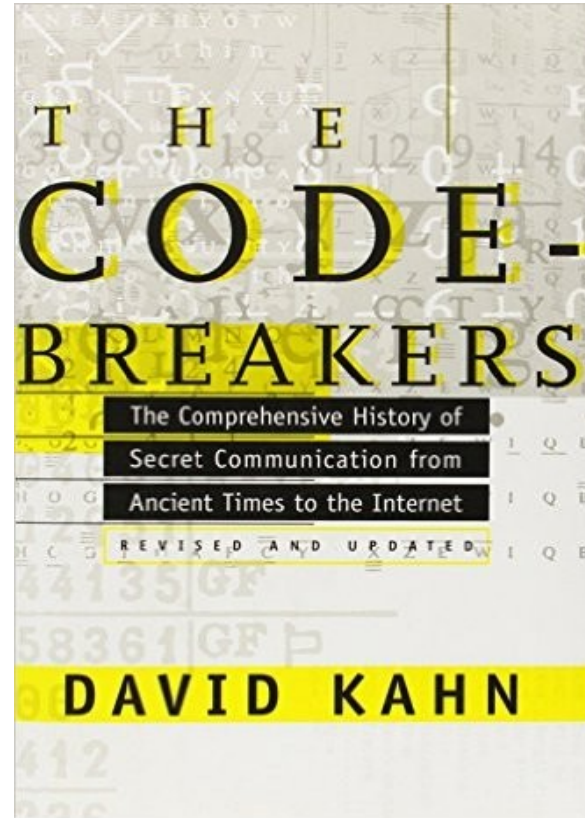

# Symmetric encryption over time



- Handwritten notes, *etc.* for centuries
  - Typically the algorithm was secret
- 1883 ... Kerckhoff's rules
  - Now we know the key should be the only secret
- 1975 ... DES
  - Efficient in hardware, not in software
- 2001 ... AES
  - Efficient in software, and lots of different kinds of hardware

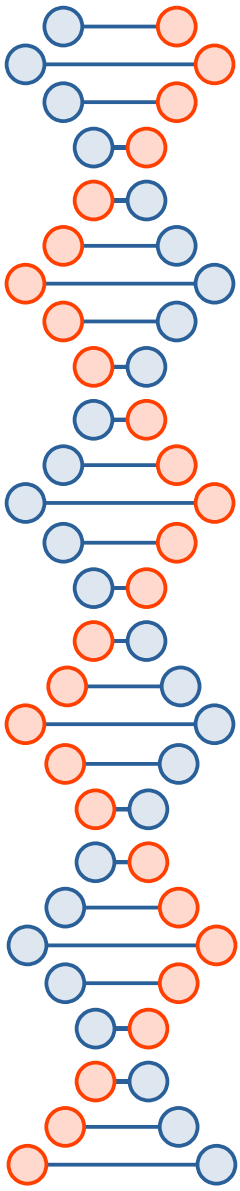

# William and Elizabeth Friedman

- Met while analyzing Shakespeare ciphers at Riverbank Laboratories (“William Friedman wrote Shakespeare's plays”)
- Elizabeth solved ciphers of alcohol and drug smugglers, then German ambassadors in South America (three enigma machines)
- William led a team that solved PURPLE, conceived CryptoAG scheme



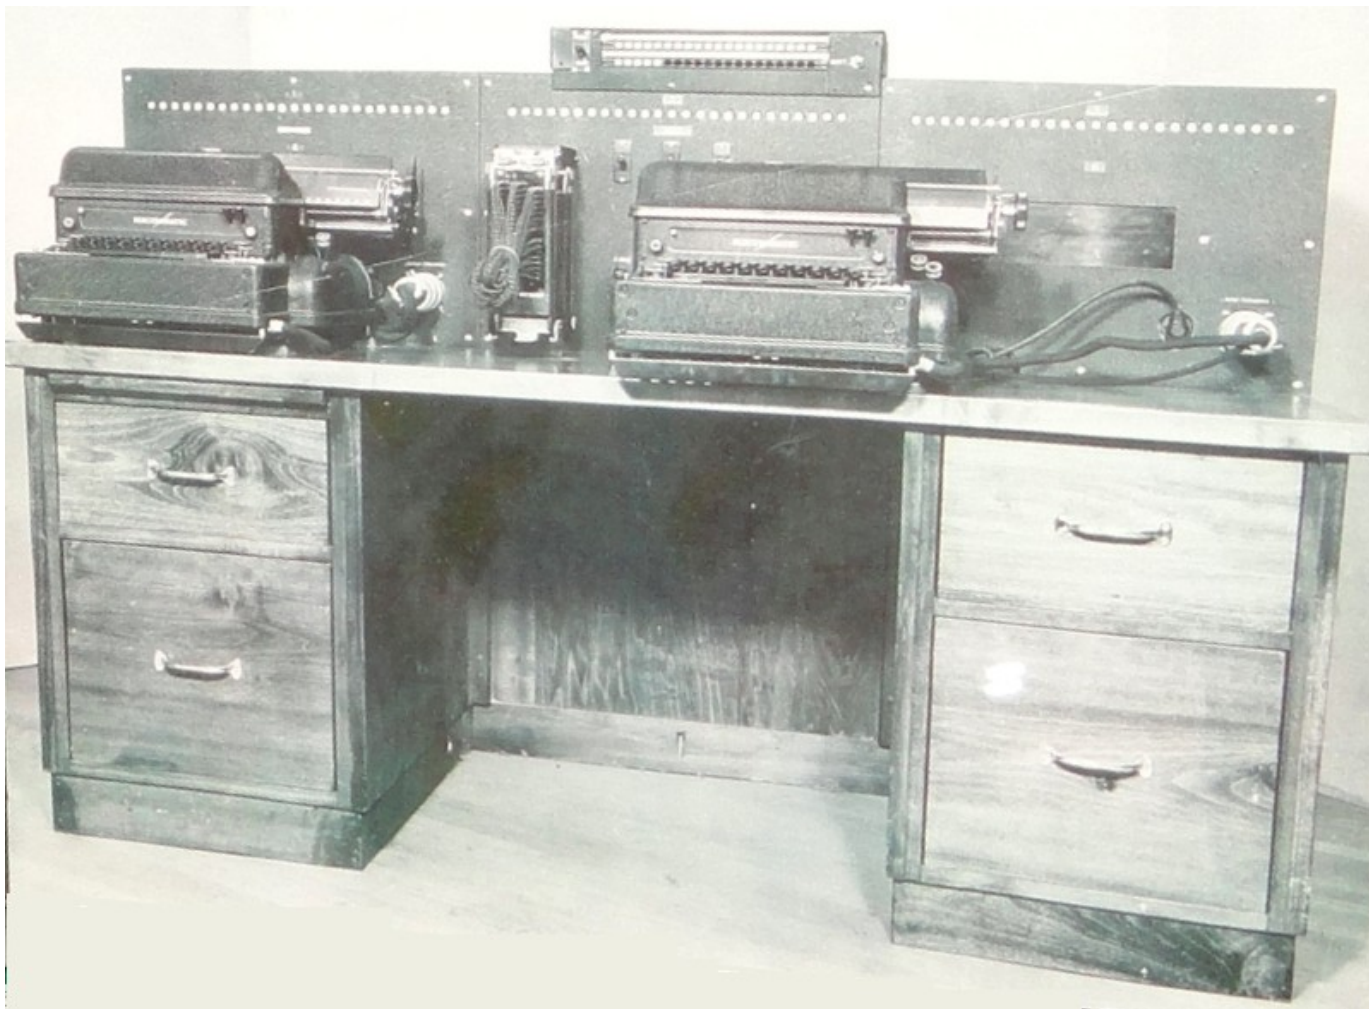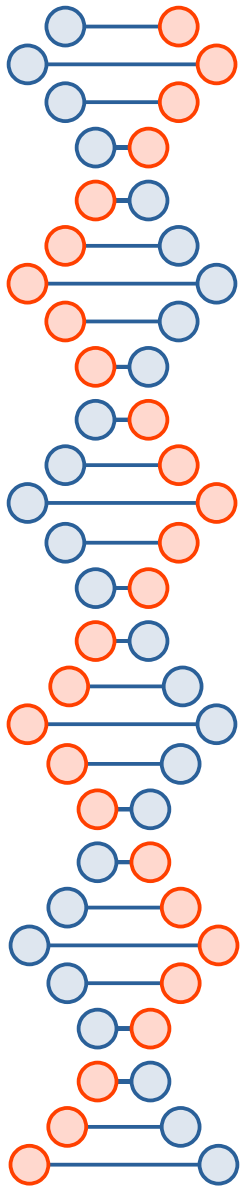


[https://en.wikipedia.org/wiki/Type\\_B\\_Cipher\\_Machine#/media/File:Purple\\_cipher\\_machine\\_analog\\_bw\\_photo\\_NCM.jpg](https://en.wikipedia.org/wiki/Type_B_Cipher_Machine#/media/File:Purple_cipher_machine_analog_bw_photo_NCM.jpg)





[https://en.wikipedia.org/wiki/Enigma\\_machine#/media/File:Enigma\\_\(crittografia\)\\_-\\_Museo\\_scienza\\_e\\_tecnologia\\_Milano.jpg](https://en.wikipedia.org/wiki/Enigma_machine#/media/File:Enigma_(crittografia)_-_Museo_scienza_e_tecnologia_Milano.jpg)

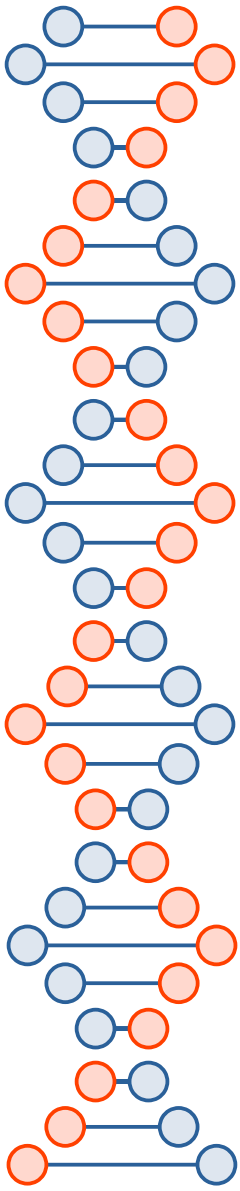


# Zodiac cipher



Image from wikia

# Bitwise XOR as a cipher itself


- Typically used by malware, 8 or 32 bits
  - WEP attack uses these properties
- $(B \text{ xor } K) \text{ xor } K = B$
- $(A \text{ xor } K) \text{ xor } (B \text{ xor } K) = A \text{ xor } B$
- $(0 \text{ xor } K) = K$
- $(K \text{ xor } K) = 0$
- Frequency analysis or brute force

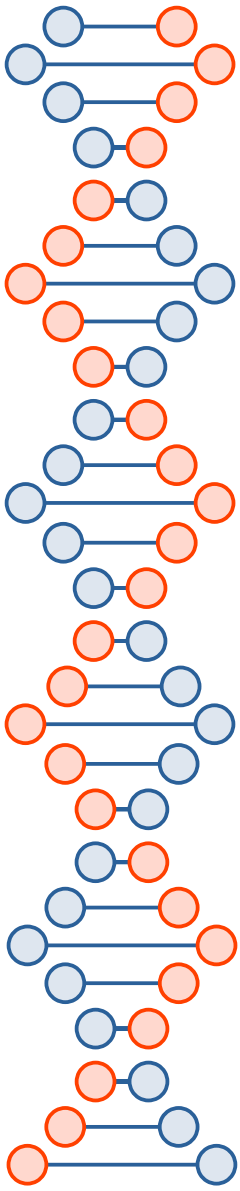






# One-time pad

- *E.g.*, an XOR cipher or Caesar cipher where the key has good randomness and is as long as the plaintext
  - And never gets reused
- Most codes made by the NSA through the 1980s were one-time pads
  - What if it's not practical to share enough key material beforehand, *e.g.*, on the Internet?

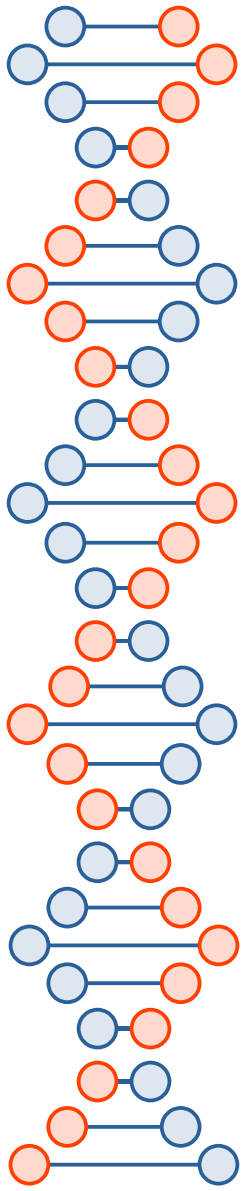

# 1977 - DES (16 rounds, 64-bit blocks, 56-bit key)

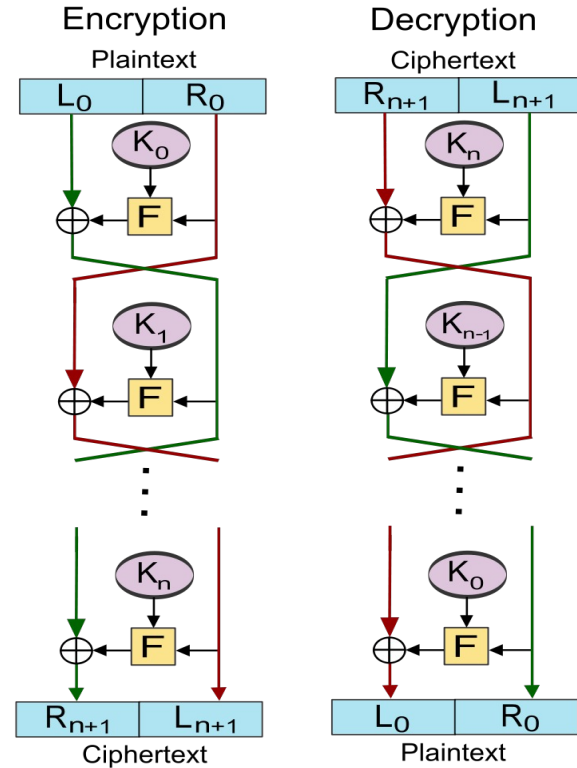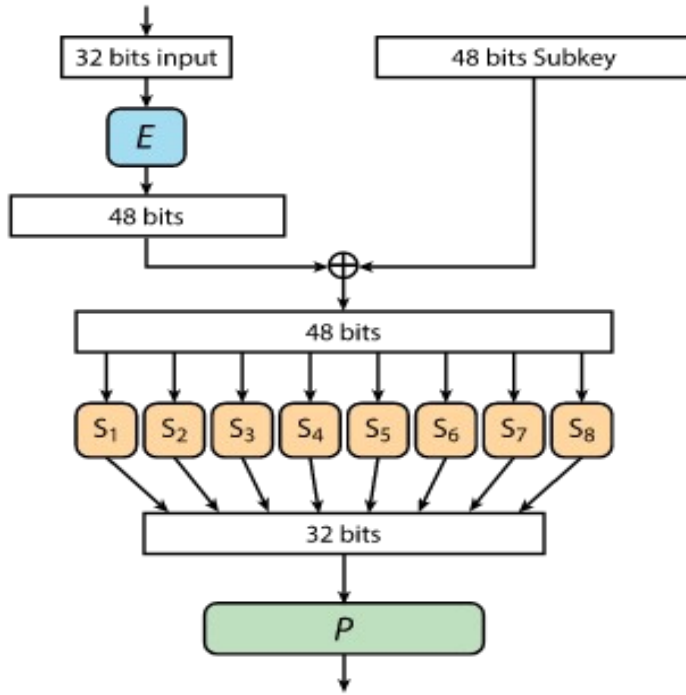

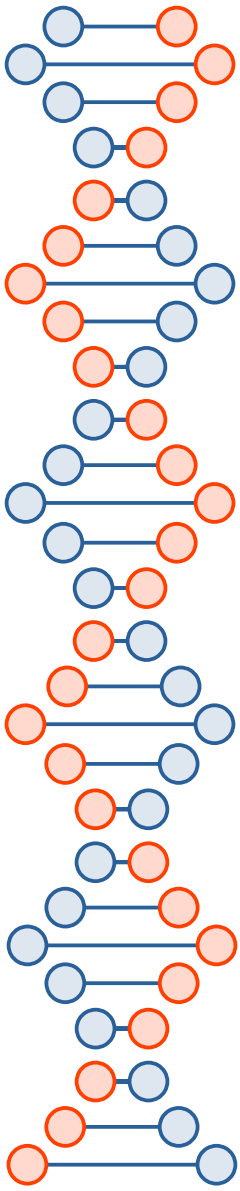


# DES S-boxes

- 6 bits becomes 4 bits
- Somewhat arbitrary
  - IBM proposed some, NSA replaced with others

שורה	מס' עמודה															
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
<b>S<sub>1</sub></b>																
0	14	4	13	1	2	15	11	8	3	10	6	12	5	9	0	7
1	0	15	7	3	14	2	13	1	10	6	12	11	9	5	3	8
2	4	1	14	8	13	6	2	11	15	12	9	7	13	10	5	0
3	15	12	8	2	4	9	1	7	5	11	3	14	10	0	6	13
<b>S<sub>2</sub></b>																
0	15	1	8	14	6	11	3	4	9	7	2	13	12	0	5	10
1	3	13	4	7	15	2	8	14	12	0	1	10	6	9	11	5
2	0	14	7	11	10	4	13	1	5	8	12	6	9	3	2	15
3	13	8	10	1	3	15	4	2	11	6	7	12	0	5	14	9
<b>S<sub>3</sub></b>																
0	10	0	9	14	6	3	15	5	1	13	12	7	11	4	2	8
1	13	7	0	9	3	4	6	10	2	8	5	14	12	11	15	1
2	13	6	4	9	8	15	3	0	11	1	2	12	5	10	14	7
3	1	10	13	0	6	9	8	7	4	15	14	3	11	5	2	12
<b>S<sub>4</sub></b>																
0	7	13	14	3	0	6	9	10	1	2	8	5	11	12	4	15
1	13	8	11	5	6	15	0	3	4	7	2	12	1	10	14	9
2	10	6	9	0	12	11	7	13	15	1	3	14	5	2	8	4
3	3	15	0	6	10	1	13	8	9	4	5	11	12	7	2	14
<b>S<sub>5</sub></b>																
0	2	12	4	1	7	10	11	6	8	5	3	15	13	0	14	9
1	14	11	2	12	4	7	13	1	5	0	15	10	3	9	8	6
2	4	2	1	11	10	13	7	8	15	9	12	5	6	3	0	14
3	11	8	12	7	1	14	2	13	6	15	0	9	10	4	5	3
<b>S<sub>6</sub></b>																
0	12	1	10	15	9	2	6	8	0	13	3	4	14	7	5	11
1	10	15	4	2	7	12	9	5	6	1	13	14	0	11	3	8
2	9	14	15	5	2	8	12	3	7	0	4	10	1	13	11	6
3	4	3	2	12	9	5	15	10	11	14	1	7	6	0	8	13
<b>S<sub>7</sub></b>																
0	4	11	2	14	15	0	8	13	3	12	9	7	5	10	6	1
1	13	0	11	7	4	9	1	10	14	3	5	12	2	15	8	6
2	1	4	11	13	12	3	7	14	10	15	6	8	0	5	9	2
3	6	11	13	8	1	4	10	7	9	5	0	15	14	2	3	12
<b>S<sub>8</sub></b>																
0	13	2	8	4	6	15	11	1	10	9	3	14	5	0	12	7
1	1	15	13	8	10	3	7	4	12	5	6	11	0	14	9	2
2	7	11	4	1	9	12	14	2	0	6	10	13	15	3	5	8
3	2	1	14	7	4	10	8	13	15	12	9	0	3	5	6	11

# Importance of substitution

- XOR and permutation are linear functions
  - Solve for the key given plaintext and ciphertext?
- Bit differences in inputs are not changed at all by permuting bits
- XOR also preserves differences in bits

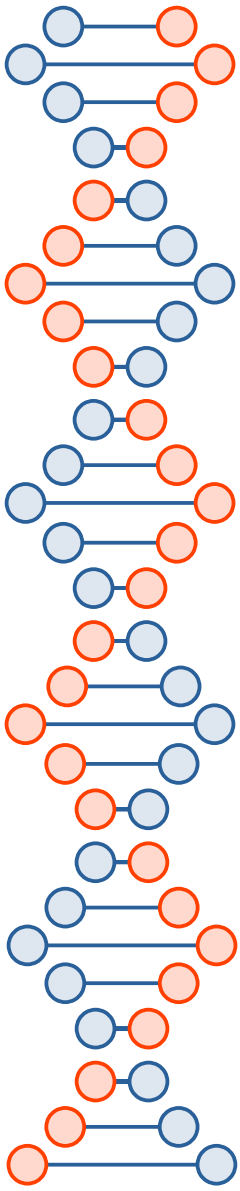




## Different approaches (preview)

- DES simply tried to thwart these two specific types of attack (linear and differential) by carefully choosing the S boxes and letting them destroy information about the input (okay because of Feistel structure)
- AES is going to do something a lot more clever, that is invertible (no need for the Feistel structure, so fewer rounds) but still thwarts linear and differential cryptanalysis.





# *Cryptography Engineering* by Ferguson *et al.*

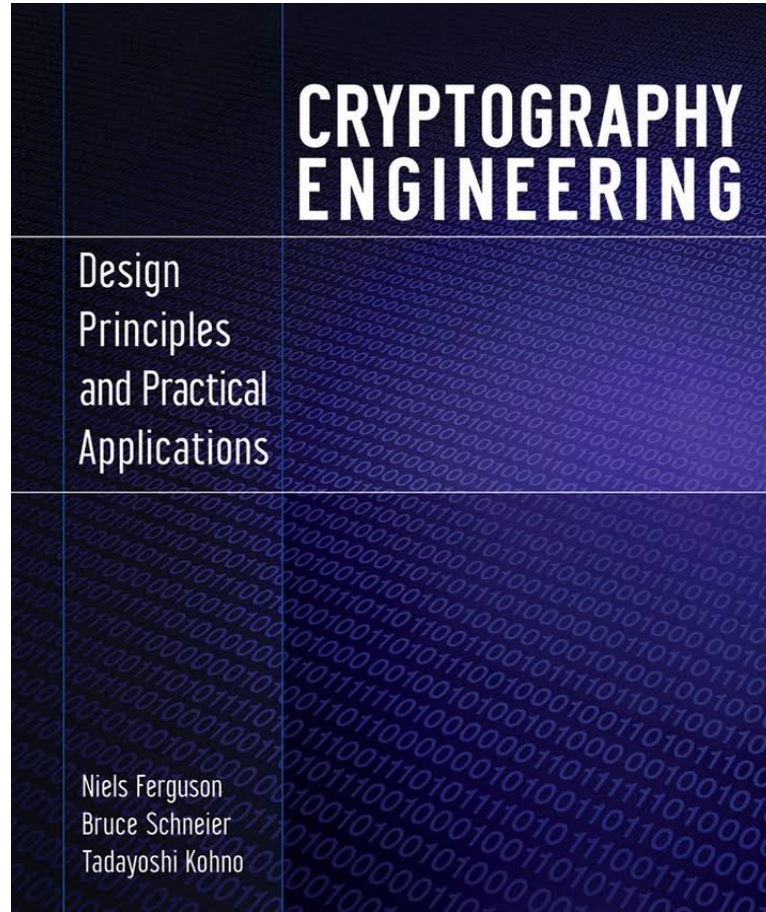



# Acknowledgments and resources

- Many of the above images are from Wikipedia
- <https://www.youtube.com/watch?v=JiQz58Y67To>